




LCU6-15CC-0305-S

CAT.6 LAN CABLE

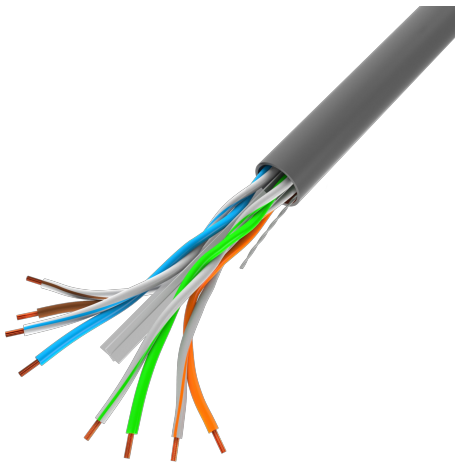

PRODUCT FEATURES:

- Category compliance confirmed by Fluke test
- Cable without shielding - U/UTP
- Solid wires made from CCA
- Designed for internal use

PRODUCT SPECIFICATION:

ICT category	Cat. 6
Shielding type	U/UTP
Conductor material	Copper plated (CCA)
Coating material	PVC
Reaction to fire category (Euroclass)	Fca
Structure of the conductor	Single-wire
Conductor thickness	0,57 mm
AWG	23
HDPE isolation	1,05 mm
Lagging thickness	0,5 mm
Outer diameter	6 mm
Maximum operating frequency	up to 250 MHz
Cable length	305 m
Maximum working distance of cable	up to 70 m
Colour	Gray